




**Stock - List 2015**



**Torispherical heads to DIN 28011**

**Material:**

- 1.4541 / 321
- 1.4571 / 316 Ti
- 1.4404 / 316L
- P 265 GH \*)
- S235JR+N



**Dished Only ends**

**Material:**


- S235JR+N



**Flat heads**

**Material:**

- S235JR+N

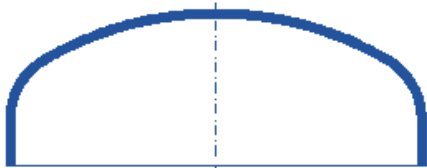


**Caps to ANSI B 16.9**

**Caps to DIN 2617/EN 10253-2**

**Material:**

- P 265 GH \*)

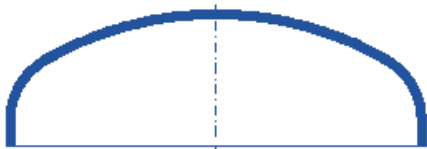

**Elliptical heads to DIN 28013**

**Material:**

- P 265 GH \*)

\*) most of the time double certifying with SA516Gr60 possible

<p><b>B A Z GmbH</b>          Leimbachstr. 225          D-57074 Siegen</p>	<p>Telefon: (++49) (0)271-33850          Telefax: (++49) (0)271-338550</p>
<p>E-Mail: <a href="mailto:info@baz-heads.de">info@baz-heads.de</a></p>	<p>Internet: <a href="http://www.baz-heads.de">http://www.baz-heads.de</a></p>

## Torispherical heads DIN 28011

### Material

OD	Thickness	1.4541 / 321	1.4571/316 Ti	1.4404/316L	P 265 GH	S235JR+N
21,3	2,0	<b>in stock</b>	<b>in stock</b>			
21,3	3,0		<b>in stock</b>		<b>in stock</b>	<b>in stock</b>
26,9	2,0	<b>in stock</b>	<b>in stock</b>			
26,9	3,0	<b>in stock</b>	<b>in stock</b>		<b>in stock</b>	<b>in stock</b>
31,8	3,0					<b>in stock</b>
33,7	2,0		<b>in stock</b>			
33,7	3,0	<b>in stock</b>	<b>in stock</b>		<b>in stock</b>	<b>in stock</b>
33,7	4,0				<b>in stock</b>	
38,0	3,0				<b>in stock</b>	<b>in stock</b>
42,4	2,0		<b>in stock</b>			
42,4	3,0	<b>in stock</b>	<b>in stock</b>		<b>in stock</b>	<b>in stock</b>
42,4	4,0				<b>in stock</b>	
44,5	3,0				<b>in stock</b>	<b>in stock</b>
48,3	2,0		<b>in stock</b>			
48,3	3,0	<b>in stock</b>	<b>in stock</b>		<b>in stock</b>	<b>in stock</b>
48,3	4,0				<b>in stock</b>	
51,0	3,0				<b>in stock</b>	<b>in stock</b>
57,0	3,0				<b>in stock</b>	<b>in stock</b>
60,3	2,0		<b>in stock</b>			
60,3	3,0	<b>in stock</b>	<b>in stock</b>		<b>in stock</b>	<b>in stock</b>
60,3	4,0		<b>in stock</b>		<b>in stock</b>	
60,3	5,0				<b>in stock</b>	
63,5	3,0				<b>in stock</b>	<b>in stock</b>
70,0	3,0				<b>in stock</b>	<b>in stock</b>
76,1	3,0	<b>in stock</b>	<b>in stock</b>		<b>in stock</b>	<b>in stock</b>
76,1	4,0		<b>in stock</b>		<b>in stock</b>	
76,1	5,0				<b>in stock</b>	
76,1	6,0				<b>in stock</b>	
82,5	3,0				<b>in stock</b>	<b>in stock</b>
88,9	3,0	<b>in stock</b>	<b>in stock</b>	<b>in stock</b>	<b>in stock</b>	<b>in stock</b>
88,9	4,0		<b>in stock</b>	<b>in stock</b>	<b>in stock</b>	
88,9	5,0				<b>in stock</b>	
88,9	6,0				<b>in stock</b>	
101,6	3,0		<b>in stock</b>			
101,6	4,0				<b>in stock</b>	<b>in stock</b>
108,0	3,0	<b>in stock</b>	<b>in stock</b>			
108,0	4,0		<b>in stock</b>		<b>in stock</b>	<b>in stock</b>
114,3	3,0	<b>in stock</b>	<b>in stock</b>			
114,3	4,0	<b>in stock</b>	<b>in stock</b>	<b>in stock</b>	<b>in stock</b>	<b>in stock</b>
114,3	5,0		<b>in stock</b>		<b>in stock</b>	
114,3	6,0		<b>in stock</b>		<b>in stock</b>	
121,0	4,0				<b>in stock</b>	<b>in stock</b>
127,0	4,0		<b>in stock</b>		<b>in stock</b>	<b>in stock</b>
133,0	3,0		<b>in stock</b>			
133,0	4,0		<b>in stock</b>		<b>in stock</b>	<b>in stock</b>
133,0	5,0				<b>in stock</b>	
139,7	3,0	<b>in stock</b>	<b>in stock</b>			
139,7	4,0	<b>in stock</b>	<b>in stock</b>	<b>in stock</b>	<b>in stock</b>	<b>in stock</b>
139,7	5,0		<b>in stock</b>		<b>in stock</b>	
139,7	6,0				<b>in stock</b>	
139,7	8,0				<b>in stock</b>	
152,4	5,0				<b>in stock</b>	
159,0	3,0	<b>in stock</b>	<b>in stock</b>			
159,0	4,0		<b>in stock</b>		<b>in stock</b>	
159,0	5,0		<b>in stock</b>		<b>in stock</b>	<b>in stock</b>

OD	Thickness	1.4541 / 321	1.4571/316 Ti	1.4404/316L	P 265 GH	S235JR+N
168,3	3,0	in stock	in stock			
168,3	4,0	in stock	in stock	in stock	in stock	
168,3	5,0	in stock	in stock	in stock	in stock	in stock
168,3	6,0		in stock		in stock	
168,3	8,0		in stock		in stock	
177,8	3,0		in stock			
177,8	5,0				in stock	in stock
193,7	3,0	in stock	in stock			
193,7	4,0		in stock			
193,7	5,0			in stock	in stock	in stock
193,7	6,0				in stock	
219,1	3,0	in stock	in stock		in stock	
219,1	4,0	in stock	in stock	in stock	in stock	
219,1	5,0	in stock	in stock		in stock	
219,1	6,0		in stock	in stock	in stock	in stock
219,1	8,0		in stock		in stock	
219,1	10,0				in stock	
219,1	12,0				in stock	
244,5	3,0		in stock			
244,5	5,0		in stock		in stock	
244,5	6,0				in stock	
244,5	8,0				in stock	
250,0	3,0		in stock		in stock	
250,0	4,0				in stock	
267,0	3,0		in stock			
267,0	6,0				in stock	
273,0	3,0	in stock				in stock
273,0	4,0	in stock	in stock	in stock	in stock	in stock
273,0	5,0		in stock	in stock	in stock	
273,0	6,0		in stock		in stock	in stock
273,0	7,0				in stock	
273,0	8,0		in stock		in stock	
273,0	10,0				in stock	
273,0	12,0				in stock	
300,0	3,0		in stock			
300,0	4,0		in stock	in stock	in stock	in stock
300,0	5,0				in stock	
300,0	6,0				in stock	
300,0	8,0				in stock	
323,9	3,0	in stock	in stock			
323,9	4,0	in stock	in stock			
323,9	5,0	in stock	in stock	in stock	in stock	
323,9	6,0		in stock		in stock	
323,9	7,0				in stock	in stock
323,9	8,0		in stock		in stock	
323,9	10,0		in stock		in stock	
323,9	12,0				in stock	
350,0	3,0				in stock	
350,0	4,0				in stock	
350,0	5,0		in stock		in stock	
350,0	6,0				in stock	
350,0	8,0				in stock	
355,6	3,0		in stock			
355,6	4,0	in stock	in stock			
355,6	5,0		in stock	in stock	in stock	
355,6	6,0				in stock	
355,6	7,0		in stock			
355,6	8,0		in stock		in stock	in stock
355,6	10,0				in stock	

OD	Thickness	1.4541 / 321	1.4571/316 Ti	1.4404/316L	P 265 GH	S235JR+N
355,6	12,0				in stock	
368,0	4,0		in stock			
368,0	6,0				in stock	
368,0	8,0				in stock	
400,0	3,0		in stock			
400,0	4,0		in stock	in stock	in stock	
400,0	5,0		in stock		in stock	
400,0	6,0				in stock	
400,0	8,0				in stock	
406,4	3,0		in stock			
406,4	4,0	in stock	in stock	in stock		
406,4	5,0		in stock		in stock	
406,4	6,0		in stock		in stock	
406,4	8,0				in stock	in stock
406,4	10,0				in stock	
419,0	5,0		in stock	in stock	in stock	
419,0	6,0		in stock		in stock	
419,0	8,0				in stock	
419,0	10,0				in stock	
450,0	3,0		in stock			
450,0	4,0		in stock		in stock	
450,0	5,0		in stock	in stock	in stock	
450,0	6,0				in stock	
450,0	8,0				in stock	
450,0	10,0				in stock	
457,2	3,0		in stock			
457,2	4,0		in stock			
457,2	5,0		in stock	in stock		
457,2	6,0				in stock	
457,2	8,0				in stock	
457,2	10,0				in stock	
457,2	12,0				in stock	
500,0	3,0		in stock	in stock	in stock	
500,0	4,0		in stock	in stock	in stock	
500,0	5,0		in stock	in stock	in stock	
500,0	6,0		in stock		in stock	
500,0	8,0				in stock	
500,0	10,0				in stock	
508,0	3,0		in stock			
508,0	4,0	in stock	in stock			
508,0	5,0	in stock	in stock	in stock	in stock	
508,0	6,0		in stock		in stock	
508,0	8,0		in stock		in stock	
508,0	10,0				in stock	
508,0	12,0				in stock	
521,0	7,0				in stock	
550,0	3,0		in stock			
550,0	4,0		in stock		in stock	
550,0	5,0		in stock	in stock	in stock	
550,0	6,0				in stock	
550,0	8,0				in stock	
550,0	10,0				in stock	
558,8	5,0		in stock			
558,8	6,0				in stock	
558,8	8,0				in stock	
600,0	3,0		in stock		in stock	
600,0	4,0		in stock	in stock	in stock	
600,0	5,0		in stock		in stock	
600,0	6,0		in stock		in stock	

OD	Thickness	1.4541/321	1.4571/316Ti	1.4404/316L	P265GH	S235JR+N
600,0	8,0		in stock		in stock	
600,0	10,0				in stock	
600,0	12,0				in stock	
609,6	4,0	in stock	in stock			
609,6	5,0		in stock	in stock		
609,6	6,0		in stock		in stock	
609,6	8,0				in stock	
609,6	10,0				in stock	
609,6	12,0				in stock	
650,0	4,0		in stock		in stock	
650,0	5,0		in stock	in stock	in stock	
650,0	6,0				in stock	
650,0	8,0				in stock	
650,0	10,0				in stock	
650,0	12,0				in stock	
660,4	8,0				in stock	
660,4	10,0				in stock	
700,0	3,0		in stock			
700,0	4,0		in stock	in stock	in stock	
700,0	5,0		in stock		in stock	
700,0	6,0		in stock		in stock	
700,0	8,0				in stock	
700,0	10,0				in stock	
700,0	12,0				in stock	
711,2	5,0		in stock			
711,2	6,0				in stock	
711,2	8,0				in stock	
711,2	10,0				in stock	
750,0	3,0				in stock	
750,0	4,0		in stock		in stock	
750,0	5,0		in stock		in stock	
750,0	6,0				in stock	
750,0	8,0				in stock	
750,0	10,0				in stock	
750,0	12,0				in stock	
800,0	3,0		in stock			
800,0	4,0		in stock	in stock	in stock	
800,0	5,0		in stock	in stock	in stock	
800,0	6,0		in stock		in stock	
800,0	8,0		in stock		in stock	
800,0	10,0				in stock	
800,0	12,0				in stock	
812,8	8,0				in stock	
812,8	10,0				in stock	
812,8	12,0				in stock	
850,0	4,0		in stock		in stock	
850,0	5,0				in stock	
850,0	6,0				in stock	
850,0	8,0				in stock	
850,0	10,0				in stock	
900,0	4,0		in stock		in stock	
900,0	5,0		in stock	in stock	in stock	
900,0	6,0		in stock		in stock	
900,0	8,0				in stock	
900,0	10,0				in stock	
900,0	12,0				in stock	
914,4	6,0				in stock	
914,4	8,0				in stock	
914,4	10,0				in stock	

OD	Thickness	1.4541 / 321	1.4571/316 Ti	1.4404/316 L	P 265 GH
950,0	4,0		in stock		
950,0	5,0				in stock
950,0	6,0				in stock
950,0	8,0				in stock
950,0	10,0				in stock
1000,0	4,0	in stock	in stock	in stock	in stock
1000,0	5,0		in stock		in stock
1000,0	6,0		in stock		in stock
1000,0	7,0				in stock
1000,0	8,0				in stock
1000,0	10,0				in stock
1000,0	12,0				in stock
1016,0	10,0				in stock
1050,0	6,0				in stock
1100,0	4,0		in stock		
1100,0	5,0		in stock		in stock
1100,0	6,0				in stock
1100,0	8,0				in stock
1100,0	10,0				in stock
1100,0	12,0				in stock
1150,0	6,0				in stock
1150,0	8,0				in stock
1150,0	10,0				in stock
1200,0	4,0		in stock		
1200,0	5,0		in stock		in stock
1200,0	6,0		in stock		in stock
1200,0	8,0				in stock
1200,0	10,0				in stock
1200,0	12,0				in stock
1220,0	10,0				in stock
1250,0	5,0				in stock
1250,0	6,0				in stock
1250,0	8,0				in stock
1250,0	10,0				in stock
1300,0	5,0				in stock
1300,0	6,0				in stock
1300,0	8,0				in stock
1300,0	10,0				in stock
1300,0	12,0				in stock
1400,0	5,0				in stock
1400,0	6,0				in stock
1400,0	8,0				in stock
1400,0	10,0				in stock
1400,0	12,0				in stock
1500,0	5,0				in stock
1500,0	6,0				in stock
1500,0	8,0				in stock
1500,0	10,0				in stock
1500,0	12,0				in stock
1600,0	5,0				in stock
1600,0	6,0				in stock
1600,0	8,0				in stock
1600,0	10,0				in stock
1600,0	12,0				in stock
1800,0	6,0				in stock
1800,0	8,0				in stock
1800,0	10,0				in stock
1800,0	12,0				in stock
2000,0	6,0				in stock

OD	Thickness	1.4541/321	1.4571/316 Ti	1.4404/316L	P265GH
2000,0	8,0				<b>in stock</b>
2000,0	10,0				<b>in stock</b>
2000,0	12,0				<b>in stock</b>
2200,0	8,0				<b>in stock</b>
2200,0	10,0				<b>in stock</b>
2200,0	12,0				<b>in stock</b>
2400,0	8,0				<b>in stock</b>
2400,0	12,0				<b>in stock</b>
2500,0	8,0				<b>in stock</b>

<b>Dished only ends</b>			<b>Flat heads</b>		
Material			Material		
OD	Thickness	S 235 JR+N	OD	Thickness	S 235 JRG 2
21,3	3,0	<b>in stock</b>	300,0	3,0	<b>in stock</b>
26,9	3,0	<b>in stock</b>	400,0	3,0	<b>in stock</b>
31,8	3,0	<b>in stock</b>	500,0	3,0	<b>in stock</b>
33,7	3,0	<b>in stock</b>			
38,0	3,0	<b>in stock</b>			
42,4	3,0	<b>in stock</b>			
44,5	3,0	<b>in stock</b>			
48,3	3,0	<b>in stock</b>			
51,0	3,0	<b>in stock</b>			
57,0	3,0	<b>in stock</b>			
60,3	3,0	<b>in stock</b>			
63,5	3,0	<b>in stock</b>			
70,0	3,0	<b>in stock</b>			
76,1	3,0	<b>in stock</b>			
82,5	3,0	<b>in stock</b>			
88,9	3,0	<b>in stock</b>			
101,6	4,0	<b>in stock</b>			
108,0	4,0	<b>in stock</b>			
114,3	4,0	<b>in stock</b>			
133,0	4,0	<b>in stock</b>			
139,7	4,0	<b>in stock</b>			
159,0	4,0	<b>in stock</b>			
168,3	4,0	<b>in stock</b>			
193,7	4,0	<b>in stock</b>			
219,1	5,0	<b>in stock</b>			
267,0	5,0	<b>in stock</b>			
273,0	5,0	<b>in stock</b>			
323,9	6,0	<b>in stock</b>			

<b>Caps to ANSI B 16.9</b>					<b>Caps to DIN 2617 (certified to DIN 2609)</b>		
Grade WPB / Material P 265 GH					Material		
OD	Thickness	Inch	STD	XS	OD	Thickness	P 265 GH
33,40	3,38/4,54	1	<b>in stock</b>	<b>in stock</b>	21,3	2,0	<b>in stock</b>
42,20	3,56/4,85	1 ¼	<b>in stock</b>	<b>in stock</b>	26,9	2,3	<b>in stock</b>
48,30	3,68/5,08	1 ½	<b>in stock</b>	<b>in stock</b>	33,7	2,6	<b>in stock</b>
60,30	3,91/5,54	2	<b>in stock</b>	<b>in stock</b>	42,4	2,6	<b>in stock</b>
73,00	5,16/7,01	2 ½	<b>in stock</b>	<b>in stock</b>	48,3	2,6	<b>in stock</b>
88,90	5,49/7,62	3	<b>in stock</b>	<b>in stock</b>	60,3	2,9	<b>in stock</b>
114,30	6,02/8,56	4	<b>in stock</b>	<b>in stock</b>	76,1	2,9	<b>in stock</b>
141,30	6,55/9,53	5	<b>in stock</b>	<b>in stock</b>	88,9	3,2	<b>in stock</b>
168,30	7,11/10,97	6	<b>in stock</b>	<b>in stock</b>	108,0	3,6	<b>in stock</b>
219,10	8,18/12,7	8	<b>in stock</b>	<b>in stock</b>	114,3	3,6	<b>in stock</b>
273,00	9,27/12,7	10	<b>in stock</b>	<b>in stock</b>	139,7	4,0	<b>in stock</b>
323,80	9,53/12,7	12	<b>in stock</b>	<b>in stock</b>	159,0	4,5	<b>in stock</b>

<b>Caps to ANSI B 16.9</b>			<b>Caps to DIN 2617</b> (certified to DIN 2609)				
Grade WPB/Material P 265 GH			Material				
355,60	9,53/12,7	14	<b>in stock</b>	<b>in stock</b>	168,3	4,5	<b>in stock</b>
406,40	9,53/12,7	16	<b>in stock</b>	<b>in stock</b>	219,1	6,3	<b>in stock</b>
457,00	9,53/12,7	18	<b>in stock</b>	<b>in stock</b>	273,0	6,3	<b>in stock</b>
508,00	9,53/12,7	20	<b>in stock</b>	<b>in stock</b>	323,9	7,1	<b>in stock</b>
610,00	9,53/12,7	24	<b>in stock</b>	<b>in stock</b>	355,6	8,0	<b>in stock</b>
					406,4	8,8	<b>in stock</b>
					457,2	10,0	<b>in stock</b>
					508,0	11,0	<b>in stock</b>

**Elliptical heads to DIN 28013**

**Material**

OD	Thickness	P 265 GH
159,0	4,0	<b>in stock</b>
168,3	4,0	<b>in stock</b>
168,3	6,0	<b>in stock</b>
168,3	10,0	<b>in stock</b>
219,1	6,0	<b>in stock</b>
219,1	7,0	<b>in stock</b>
219,1	11,0	<b>in stock</b>
273,0	6,0	<b>in stock</b>
273,0	8,0	<b>in stock</b>
273,0	11,0	<b>in stock</b>
323,9	6,0	<b>in stock</b>
323,9	8,0	<b>in stock</b>
323,9	11,0	<b>in stock</b>
355,6	7,0	<b>in stock</b>
355,6	8,0	<b>in stock</b>
355,6	11,0	<b>in stock</b>
406,4	8,0	<b>in stock</b>
406,4	11,0	<b>in stock</b>
457,2	8,0	<b>in stock</b>
457,2	9,0	<b>in stock</b>
457,2	11,0	<b>in stock</b>
500,0	6,0	<b>in stock</b>
500,0	10,0	<b>in stock</b>
508,0	8,0	<b>in stock</b>
508,0	10,0	<b>in stock</b>
508,0	11,0	<b>in stock</b>
600,0	8,0	<b>in stock</b>
609,6	8,0	<b>in stock</b>
609,6	10,0	<b>in stock</b>
609,6	11,0	<b>in stock</b>
711,2	10,0	<b>in stock</b>
800,0	6,0	<b>in stock</b>
800,0	8,0	<b>in stock</b>
800,0	10,0	<b>in stock</b>
900,0	8,0	<b>in stock</b>
1000,0	10,0	<b>in stock</b>
1200,0	8,0	<b>in stock</b>
1200,0	12,0	<b>in stock</b>
1400,0	8,0	<b>in stock</b>